




REV.	DESCRIPTION OF REVISIONS	APPR.	DRAW.	RELEASE	DATE
X1					
X2					




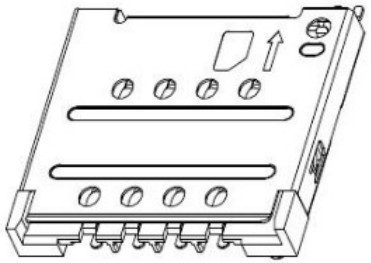


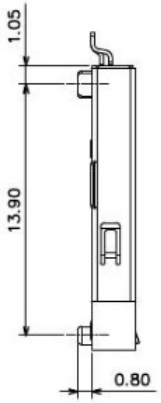

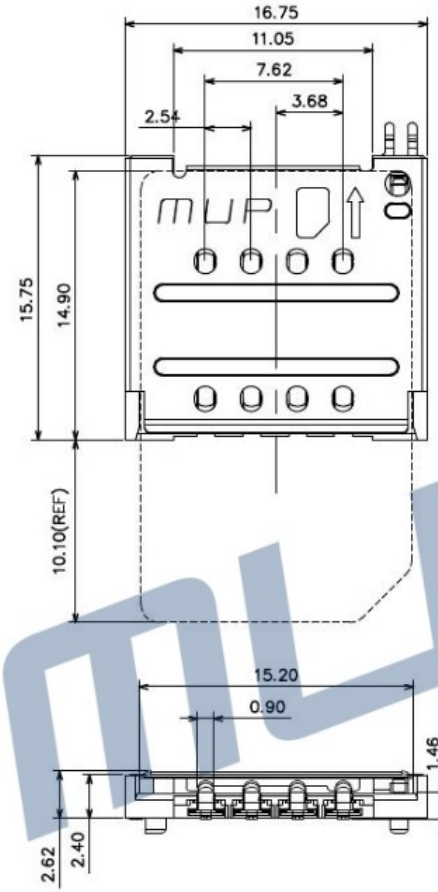

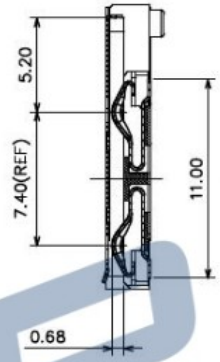

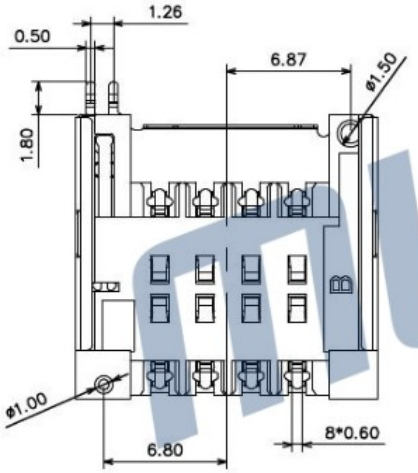

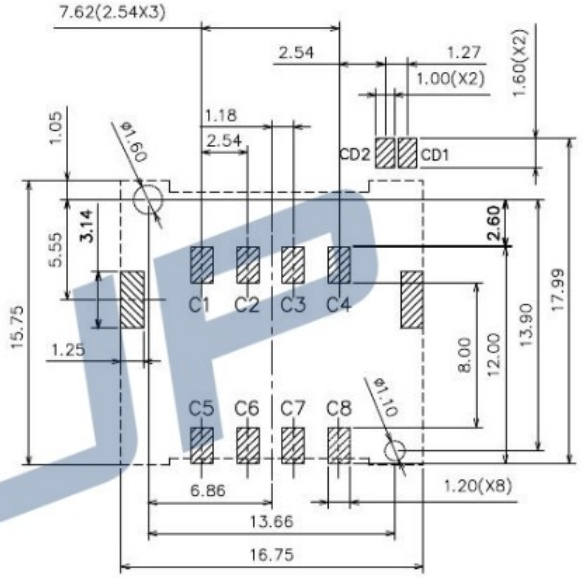

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

TECHNICAL CHARACTERISTICS

1.General Characteristics
- Dimensions: 16.75LX15.75WX2.60H mm
- Weight: Approx g
- Durability: 5,000 cycles min.

2.Electrical Characteristics
- Contact resistance: 50mΩ typical,100mΩ max
- Insulation resistance: >1000MΩ/500V DC

3.Solderability
- Vaporphase: 215°C,30sec.Max
- IR reflow: 250°C,5sec.Max
- Manual soldering: 370°C,3sec.Max

4.Environmental Characteristics
- Operating temperature: −40°C~+85°C
- Operating humidity: 10%~+95%RH

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi−temp Thermoplastic	Black UL94V−0
2	DATA CONTACT	8	Copper Alloy	Contact area:Gold plated
3	SHELL	1	Stainless Steel	SMT area:Ni plated
4	SWITCH CONTACT−1	1	Copper Alloy	Contact area:Gold plated
5	SWITCH CONTACT−2	1	Copper Alloy	Contact area:Gold plated

Unless otherwise specified, other tolerance are:

X	±0.35	X°	±5°
X.X	±0.25	X.X°	±4°
X.XX	±0.15	X.XX°	±3°
X.XXX	±0.10	X.XXX°	±2°

MUP® MUP INDUSTRIAL CO.,LTD.

NAME:	SIM Card Connector
MODEL NO:	MUP C732-3
TYPE :	H2.60 with Post 8p
DRAWN	Jimmy 5/10−17'
CHECKED	Jimmy 5/10−17'
APPROVAL	WANG 5/10−17'
DWG NO. :	DWG−MUP−C732−003
SHEET	1/1
REVISION	X1

PROJ. | UNIT mm | SCALE 1:1

CUSTOMER DRAWING

Pb RoHS PROCESS COMPLIANT

MUP