Specifications

Car cable for Automotive

TYPE	FLRY-A 1.5 mm²
Cross-Section Diagram	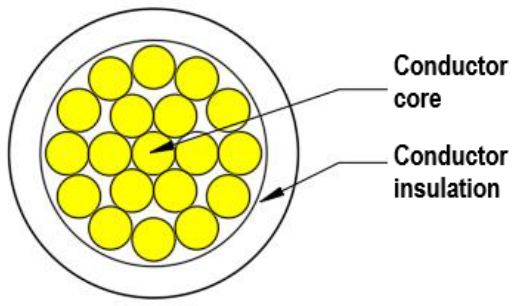

Wire & Cable Construction	
Core size	1.5 mm²
Conductor material	Bare Copper
Construction (No/mm)	19/0.32
Single Cond. dia. (mm)	0.32±0.009
Insulation Material	PVC
Nom. Thickness (mm)	0.3
Min. Thickness (mm)	0.24
Insulation dia. (mm)	2.3±0.10
Packing	MINYX Standard

Electrical Properties	
Test Object Item	Req. Value
Rated Temperature	100°C
Rated Voltage	DC 60V
Max.Cond.Resistance at 20℃	12.7 Ω/km
Reference Standard	ISO 19642
Dielectric-Withstand Test	1000V/30min

Physical Properties	
Test Object Item	Req. Value
Elongation of insulation before aging（%）	100
Tensile strength of insulation before aging (MPa)	10.3

Insulation Color	Marking
According to customer requirement	*According to customer requirement*

Other requirements

MINYX servis s.r.o.

E-mail: obchod@minyx.cz

Tel.: +420 511 199 111

www.minyx.cz