


序号/RevNo.	名称/Title	文件编号/File No.
1	XY301S 端子	QJ/XYT-2125501
2	XY301 弹片	QJ/XYT-2225101
3	XY30-C 螺丝	QJ/XYT-2125502
4	XY301S 塑件	QJ/XYT-2125503

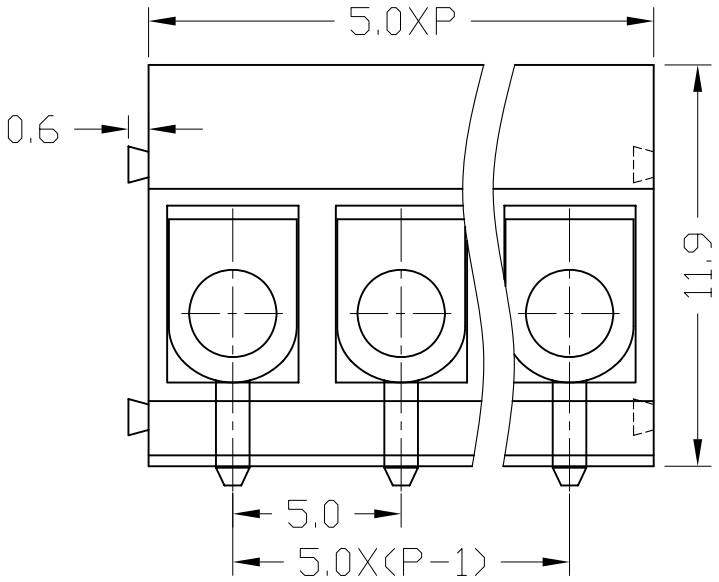

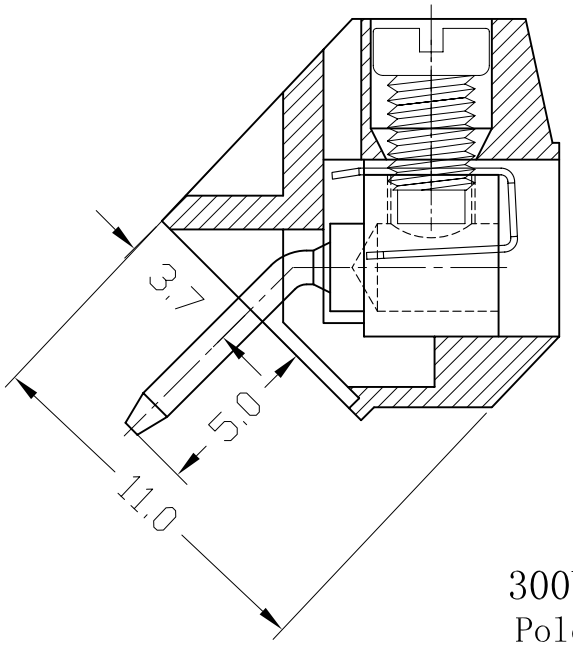

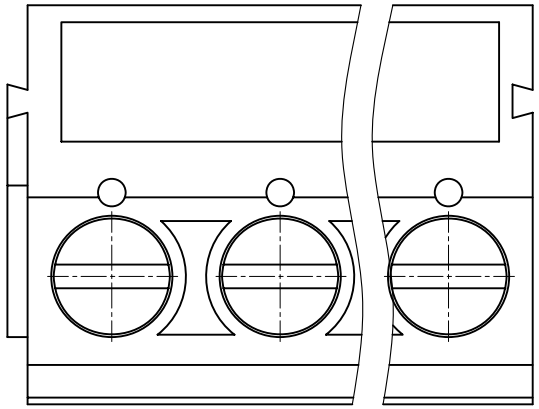

300V 15A 22-14AWG 1.5mm^2

Poles: 2P&3P-24P

Pitch: 5.0mm(.197")

Materials

Housing: PA66(UL 94V-0)

Wire Protector: Stainless Steel

Solder Pin: Brass,Tin Plated

Screw: M2.5,Steel(A3),Zinc Plated

Torque: 0.4N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx° ±0.5° .xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/File name: XY301S 产品图	文件编号/File No.: QJ/XYT-2125500	
			页序/Sheet:	
		备注/Remark:		单位/Units: mm