


序号/RevNo.	名称/Title	文件编号/File No.
1	XY306螺丝	QJ/XYT-2127101
2	XY306簧片共用301	QJ/XYT-2127102
3	XY306端子	QJ/XYT-2127103
4	XY306塑件	QJ/XYT-2127104

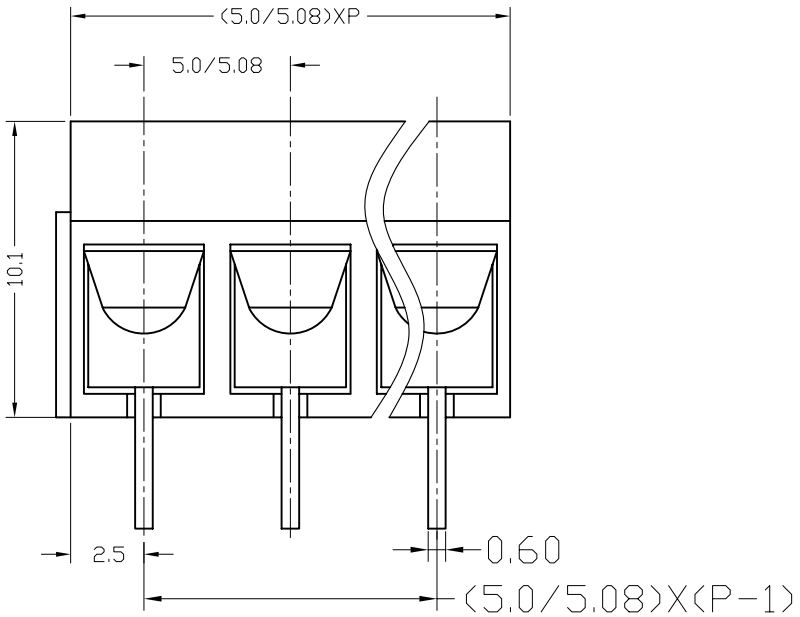

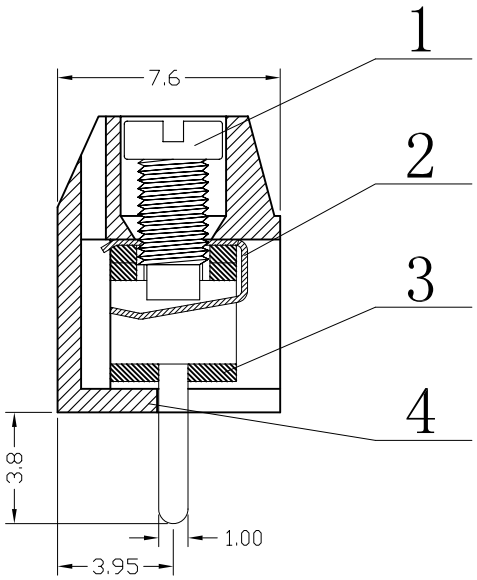

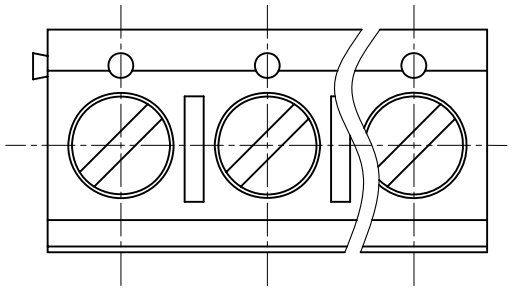

300V 10A 22-14AWG 1.5mm^2
Poles: 2P&3P-24P
Pitch: 5.0mm(.197″),5.08mm(.200″)

Materials
Housing: PBT(UL 94V-0)
Wire Protector: Stainless steel
Solder Pin: Brass,Tin Plated
Screw: M2.5,Steel(A3),Zinc Plated
Torque: 0.4N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx° ±0.5° .xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title: XY306 A/B 产品图	文件编号/File No.: QJ/XYT-2227100 QJ/XYT-2227200	
		备注/Remark	页序/Sheet	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date