

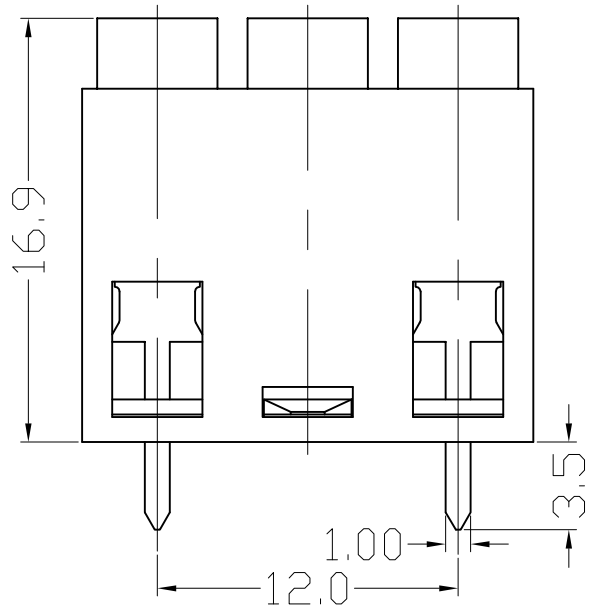


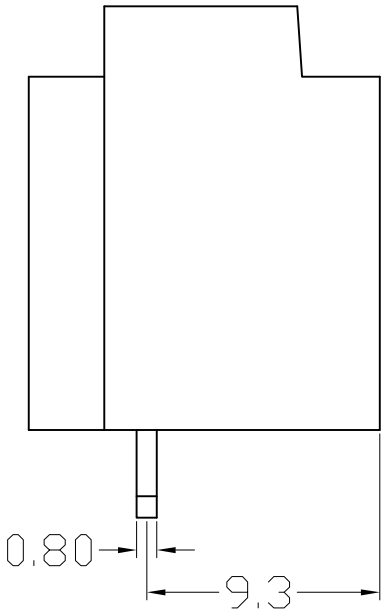

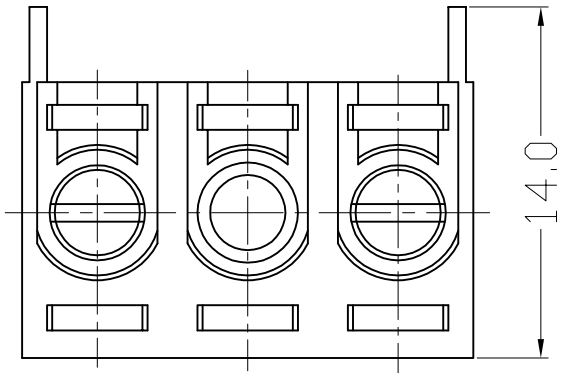

300V 15A 24-12AWG 2.5mm^2
Poles: 2P
Pitch: 12.0 mm(.472")

Materials
Housing: PA66(UL 94V-0)
Solder Pin: Brass,Tin Plated
Wire Cage: Brass,Nickel Plated
Screw: M3,Steel(A3),Zinc Plated
Torque: 0.5N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx° ±0.5° .xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title: CM 73/07	文件编号/File No.	
			页序/Sheet	
		备注/Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date