finder
RELAYING INNOVATION

45
SERIES

Miniature PCB Relays + Faston 250 10 - 16 A

- Burners, boilers and furnaces
- Jacuzzis and hot tubs
- Infrared and microwave ovens
- Film projectors
- Electronic circuit boards
- Control and management of electric power
- Inverter
- Charging Stations



Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice.
FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document.
In case of discrepancies between the printed and online versions, the latter prevails.

Relay for +105 °C ambient use
PCB mount - high contact gap for photovoltaic inverters and charging station
PCB mount

- **45.31…0310, 1 Pole normally open (≥ 3 mm contact gap)**
- **45.31…4310, Conform to Annex CC EN 61439-7:2018 for ev charging station**
- **45.31…0610, 1 Pole normally open (≥ 3.6 mm contact gap)**

- Contact gap ≥ 3 mm or ≥ 3.6 mm according to EN 60730-1
- Sensitive DC coil - 360 mW (45.31…x310 type)
- Cadmium Free contact material
- Reinforced insulation between coil and contacts according to EN 60335-1, EN 50178, EN 60204 with safe separation and 8 mm clearance and creepage distance
- 6 kV (1.2/50 µs) isolation, coil-contacts
- Flux proof: RT II

For UL ratings see:
"General technical information" page VIII

For outline drawing see page 7

	45.31-0310	NEW **45.31-4310**	**45.31-0610**
			
	• 1 NO (SPST-NO), ≥ 3 mm gap • Max ambient temperature +105 °C • PCB mounting	• 1 NO (SPST-NO), ≥ 3 mm gap • Conform to Annex CC EN 61439-7:2018 for ev charging station • Max ambient temperature +105 °C • PCB mounting	• 1 NO (SPST-NO), ≥ 3.6 mm gap • Max ambient temperature +105 °C • PCB mounting
	 45.31…0310 (1 NO/SPST-NO)	 45.31…4310 (1 NO)	 45.31…0610 (1 NO/SPST-NO)
	 Copper side view	 Copper side view	 Copper side view
Contact specification			
Contact configuration	1NO (SPST-NO) ≥ 3 mm gap	1NO (SPST-NO) ≥ 3 mm gap	1NO (SPST-NO) ≥ 3.6 mm gap
Rated current/Maximum peak current (@ 105°C) A	16/30	16/80	10/30
Maximum switching current/Maximum peak current (@85°C) A	—	20/80	—
Rated voltage/ Maximum switching voltage V AC	250/400	250/400	500/500
Rated load AC1 VA	4000	4000	5000
Peak current conform to Annex CC EN 61439-7:2018 A	—	230 (70 µs)	—
Peak current conform to IEC60669-2-1 A2:2015 A	—	120 (600 µs)	—
LED lamps rating (230 V) W	—	125	—
Rated load AC15 (230 V AC) VA	750	—	750
Single phase motor rating (230 V AC) kW	0.55	—	0.55
Breaking capacity DC1: 24/110/220 V A	16/4/1	16/4/1	10/4/1
Minimum switching load mW (V/mA)	500 (10/5)	500 (10/5)	500 (10/5)
Standard contact material	AgNi	$AgSnO_2$	AgNi
Coil specification			
Nominal voltage (U_N) V AC (50/60 Hz)	—	—	—
V DC	6 - 12 - 24 - 48 - 60	6 - 12 - 24 - 48 - 60	6 - 12 - 24 - 48 - 60
Rated power AC/DC VA (50 Hz)/W	—/0.36	—/0.36	—/0.55
Operating range AC	—	—	—
DC	(0.7…1.2)U_N	(0.7…1.2)U_N	(0.8…1.2)U_N
Holding voltage AC/DC	—/0.4 U_N	—/0.4 U_N	—/0.4 U_N
Must drop-out voltage AC/DC	—/0.1 U_N	—/0.1 U_N	—/0.1 U_N
Technical data			
Mechanical life AC/DC cycles	—/$10 \cdot 10^6$	—/$10 \cdot 10^6$	—/$2 \cdot 10^6$
Electrical life at rated load AC1 cycles	$30 \cdot 10^3$	$20 \cdot 10^3$	$10 \cdot 10^3$
Operate/release time ms	12/2	12/2	12/2
Insulation between coil and contacts (1.2/50 µs) kV	6 (8 mm)	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts V AC	2500	2500	3000
Ambient temperature range °C	–40…+105	–40…+105	–40…+105
Environmental protection	RT II	RT II	RT II
Approvals (according to type)	EAC 03 cULus VDE	EAC 15 cULus VDE	EAC 03 cULus VDE

A

Relays for +125 °C ambient use
PCB mount - Faston 250 contact connections

- **45.71, 1 Pole normally open or normally closed**
- **45.91, 1 Pole normally open (≥ 3 mm contact gap)**

- Contact gap ≥ 3 mm according to EN 60730-1 (45.91 type)
- Sensitive DC coil - 360 mW
- Cadmium Free option available
- Reinforced insulation between coil and contacts according to EN 60335-1, EN 50178, EN 60204 with safe separation and 8 mm clearance and creepage distance
- 6 kV (1.2/50 µs) isolation, coil-contacts
- Flux proof: RT II standard, (RT III option)

For UL ratings see:
"General technical information" page VIII

For outline drawing see page 7

	45.71	45.91
		
	• 1 NO or 1 NC (SPST-NO or SPST-NC) • Max ambient temperature +125 °C • PCB mounting + Faston 250	• 1 NO (SPST-NO), ≥ 3 mm gap • Max ambient temperature +125 °C • PCB mounting + Faston 250
	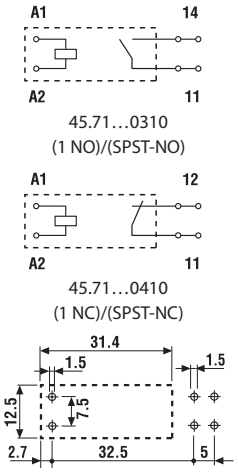	
	Copper side view	Copper side view
Contact specification		
Contact configuration	1NO or 1NC (SPST-NO or SPST-NC)	1NO (SPST-NO) ≥ 3 mm gap
Rated current/Maximum peak current A	16/30	16/30
Rated voltage/ Maximum switching voltage V AC	250/400	250/400
Rated load AC1 VA	4000	4000
Rated load AC15 (230 V AC) VA	750	750
Single phase motor rating (230 V AC) kW	0.55	0.55
Breaking capacity DC1: 24/110/220 V A	16/0.3/0.13	16/4/1
Minimum switching load mW (V/mA)	500 (10/5)	500 (10/5)
Standard contact material	AgNi	AgNi
Coil specification		
Nominal voltage (U_N) V AC (50/60 Hz)	—	—
V DC	6 - 12 - 24 - 48 - 60	6 - 12 - 24 - 48 - 60
Rated power AC/DC VA (50 Hz)/W	—/0.36	—/0.36
Operating range AC	—	—
DC	(0.7…1.2)U_N	(0.7…1.2)U_N
Holding voltage AC/DC	—/0.4 U_N	—/0.4 U_N
Must drop-out voltage AC/DC	—/0.1 U_N	—/0.1 U_N
Technical data		
Mechanical life AC/DC cycles	—/10 · 10^6	—/10 · 10^6
Electrical life at rated load AC1 cycles	100 · 10^3	30 · 10^3
Operate/release time ms	10/2	12/2
Insulation between coil and contacts (1.2/50 µs) kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts V AC	1000	2500
Ambient temperature range °C	–40…+125	–40…+125
Environmental protection	RT II	RT II
Approvals (according to type)	EAC 03 cULus VDE	EAC 15 cULus VDE

V-2025, www.findernet.com

A

Ordering information

Example: 45 series for PCB relay + Faston 250, 1 NO (SPST-NO), 12 V DC coil.

										A	B	C	D	
4	5	.	7	1	.	7	.	0	1	2	.	0	3	1	0	

Series

Type
3 = PCB mount, ≥ 3 mm or ≥ 3.6 mm contact gap
7 = PCB + Faston 250 mount
9 = PCB + Faston 250 mount, ≥ 3 mm

No. of poles
1 = 1 pole, 16 A
1 pole, 10 A (45.31-0610 only)

Coil version
7 = Sensitive DC
9 = Standard DC (45.31-0610 only)

Coil voltage
See coil specifications

A: Contact material
0 = Standard AgNi for 45.31 and 45.91
1 = Standard AgNi for 45.71
4 = $AgSnO_2$ for 45.31

B: Contact circuit
3 = NO (SPST)
4 = NC (SPST) 45.71 only
6 = NO (SPST), ≥ 3.6 mm

C: Options
1 = None

D: Special versions
0 = Flux proof (RT II)
1 = Wash tight (RT III) 45.71 and 45.91 only

Selecting features and options: only combinations in the same row are possible.

Type	Coil version	A	B	C	D
45.31	sensitive DC	0 - 4	3	1	0
	standard DC	0	6	1	0
45.71	sensitive DC	1	3 - 4	1	0 - 1
45.91	sensitive DC	0	3	1	0 - 1

Technical data

Insulation according to EN 61810-1					
		45.71		**45.31 / 45.91**	
Nominal voltage of supply system	V AC	230/400		230/400	
Rated insulation voltage	V AC	250	400	250	400
Pollution degree		3	2	3	2
Insulation between coil and contact set					
Type of insulation		Reinforced (8 mm)		Reinforced (8 mm)	
Overvoltage category		III		III	
Rated impulse voltage	kV (1.2/50 µs)	6		6	
Dielectric strength	V AC	4000		4000	
Insulation between open contacts					
Type of disconnection		Micro-disconnection		Full-disconnection	
Overvoltage category		—		III	
Rated impulse voltage	kV (1.2/50 µs)	—		4	
Dielectric strength	V AC/kV (1.2/50 µs)	1000/1.5		2500/4	
Insulation between coil terminals					
Rated impulse voltage (surge) differential mode (according to EN 61000-4-5)	kV (1.2/50 µs)	2			

Other data			**45.71**	**45.31 / 45.91**
Bounce time: NO/NC		ms	3/3	2/—
Vibration resistance (10…150)Hz: NO/NC		g	20/10	20/—
Shock resistance		g	20	
Power lost to the environment	without contact current	W	0.4	
	with rated current	W	1.8	
Recommended distance between relays mounted on PCB		mm	≥ 5	

Contact specification

A

F 45 - Electrical life (AC) v contact current
Type 45.71

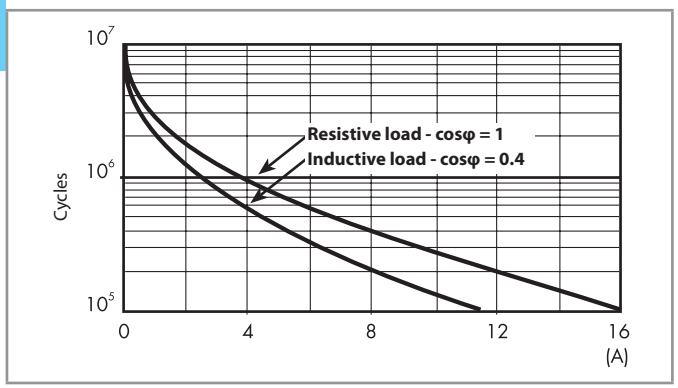

F 45 - Electrical life (AC) v contact current
Type 45.31/45.91

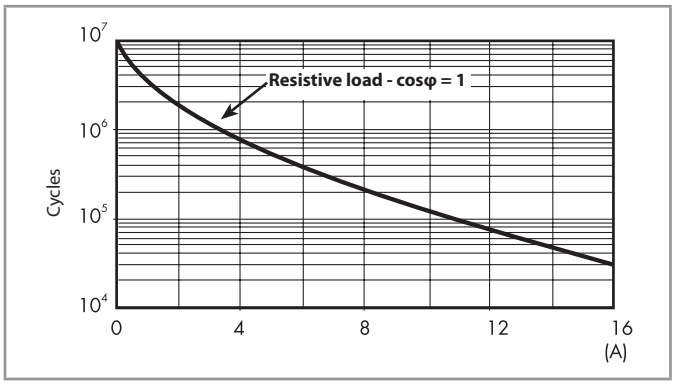

F 45 - Electrical life (AC) v contact current
Type 45.31…4310

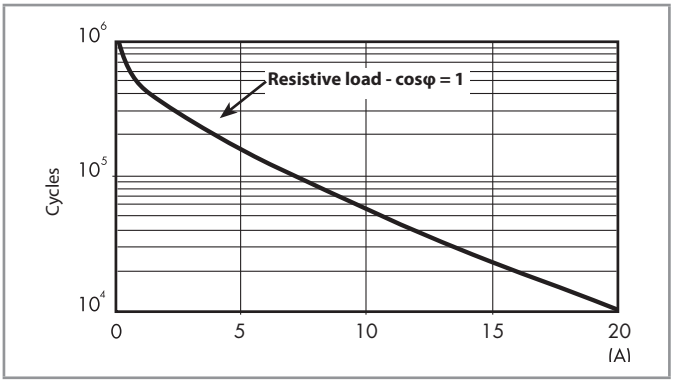

H 45 - Maximum DC1 breaking capacity

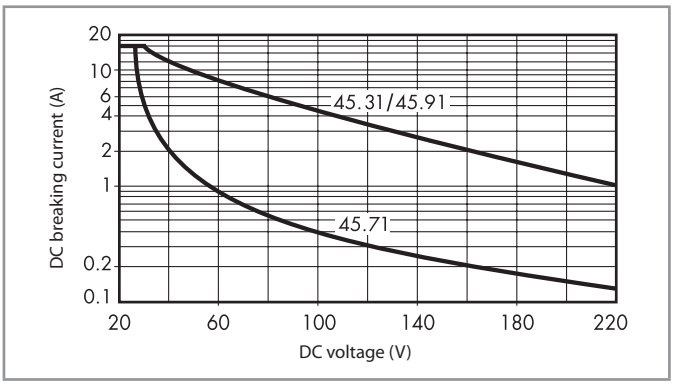

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10^3 cycles (45.71) and ≥ 30 · 10^3 cycles (45.31, 45.91) can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time for the load will be increased.

Coil specifications

DC coil data - 0.36 W sensitive

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Resistance R	Rated coil consumption I at U_N
V		V	V	Ω	mA
6	**7**.006	4.2	7.2	100	60
12	**7**.012	8.4	14.4	400	30
24	**7**.024	16.8	28.8	1600	15
48	**7**.048	33.6	57.6	6400	7.5
60	**7**.060	42	72	10000	6

DC coil data - 0.55 W standard

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Resistance R	Rated coil consumption I at U_N
V		V	V	Ω	mA
6	**9**.006	4.2	7.2	72	83
12	**9**.012	8.4	14.4	300	40
24	**9**.024	16.8	28.8	1150	21
48	**9**.048	33.6	57.6	4400	11
60	**9**.060	42	72	7200	8.3

R 45 - DC coil operating range v ambient temperature

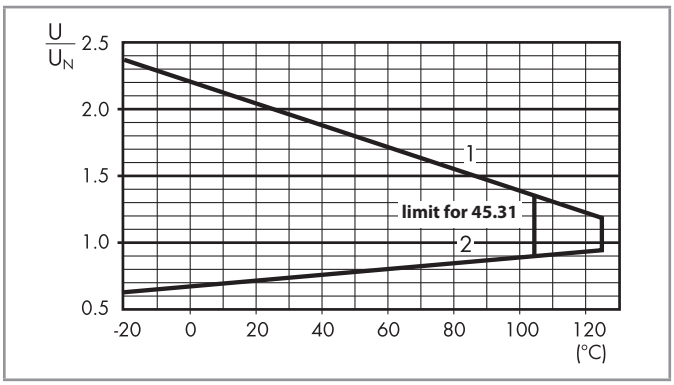

1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

Outline drawings

Type 45.31



Types 45.71/91

